


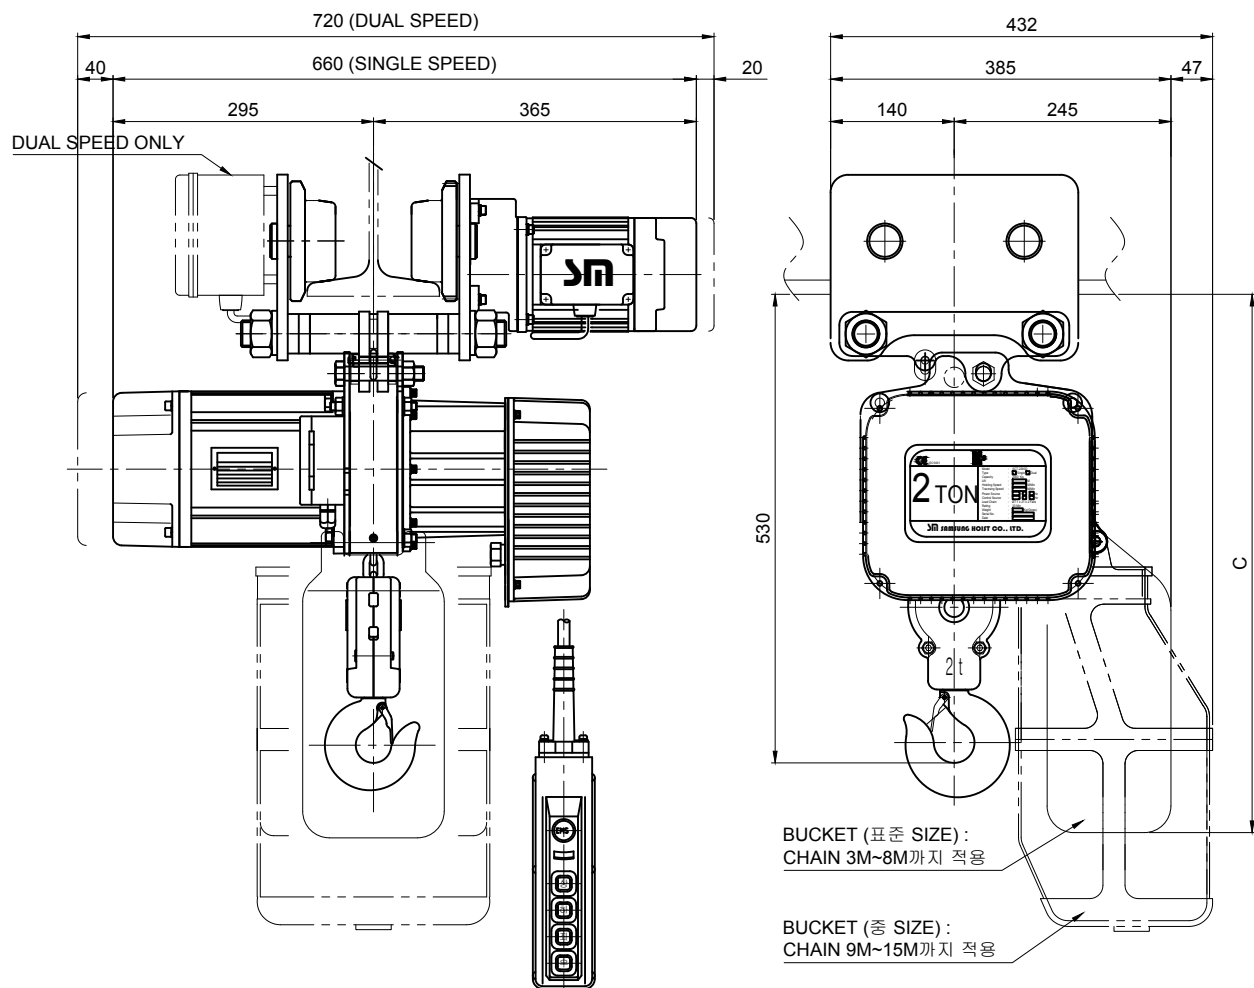

SPECIFICATION				
HOISTING LOAD			2 TON	
TESTING LOAD			2.5 TON	
LIFTING HEIGHT			MAX. 50 M	
HOISTING	HERTZ		50 Hz	60 Hz
	SINGLE	SPEED	2.9 M/MIN	3.5 M/MIN
		MOTOR	1.25 Kw * 4P	1.5 Kw * 4P
	DUAL	SPEED	2.9 / 1.5 M/MIN	3.5 / 1.8 M/MIN
		MOTOR	1.25/0.63 Kw * 4/8P	1.5/0.75 Kw * 4/8P
TRAVERSING	FAST	SPEED	15.8 M/MIN	19.0 M/MIN
		MOTOR	0.33 Kw * 4P	0.4 Kw * 4P
	MIDDLE	SPEED	10.0 M/MIN	12.0 M/MIN
		MOTOR	0.22 Kw * 6P	0.27 Kw * 6P
	SLOW	SPEED	7.9 M/MIN	9.5 M/MIN
		MOTOR	0.17 Kw * 8P	0.2 Kw * 8P
	DUAL	SPEED	15.8 / 7.9 M/MIN	19.0 / 9.5 M/MIN
		MOTOR	0.33/0.17 Kw * 4/8P	0.4/0.2 Kw * 4/8P
	* Remark 60HZ is standard "6P" 50HZ is standard "4P"			
	POWER SUPPLY		3Ø 220V ~ 575V	
CONTROL VOLTAGE		1Ø 48V, 110V		
OPERATING METHOD		PUSH BUTTON TYPE		
LOAD CHAIN SPEC.		Ø7.1 * 21P * 2 FALLS		
I-BEAM WIDTH		100mm ~ 150mm		
RADIUS OF BEAM		MIN. 1500mm		
RATING		30 MIN.		
NET. WEIGHT		MIN. 115 KG ~ MAX. 208 KG		

DIMENSIONS				
	LIFTING HEIGHT			
	3M ~ 8M	9M ~ 15M	15M ~ 25M	
C	610	700	900	